

Santa Cruz Highway 9 CAPM

Santa Cruz County - Highway 9 - Post Mile .046/7.5

Description


The Santa Cruz County CAPM is located in Santa Cruz County on Highway 9 from just south of Irwin Way to just South of El Solyd Heights Dr. The project proposes to preserve about 15 lane miles of flexible Class 3 pavement using Capital Preventative Maintenance (CAPM) strategies, upgrade guardrail, replace culverts, install census stations, replace sign panels, and upgrade curb ramps where applicable. It will also include some complete streets opportunities as recommended in the "Highway 9/San Lorenzo Valley Complete Streets Corridor Plan".

Purpose & Need

The purpose of this project is to preserve and extend the life of the existing pavement, restore drainage facilities to maintain the functionality of the culverts, and maintain an efficient transportation information system. There is a need because the pavement within the project limits is exhibiting deterioration, and will result in higher maintenance costs in the future. Corrosion and scouring have led to damaged inverts, shape loss, joint separation, and undermined backfill of the culverts, causing them to not function properly. Traffic management elements will be replacing the temporary loops with permanent census stations, otherwise the information collected from these systems may be unreliable or absent.

Current Schedule

Approve Project Initiation Doc.	Complete
Approve Project Report and Environ. Doc.	January 2025
100% Design Completion	November 2026
Begin Construction	May 2027
End Construction	July 2029

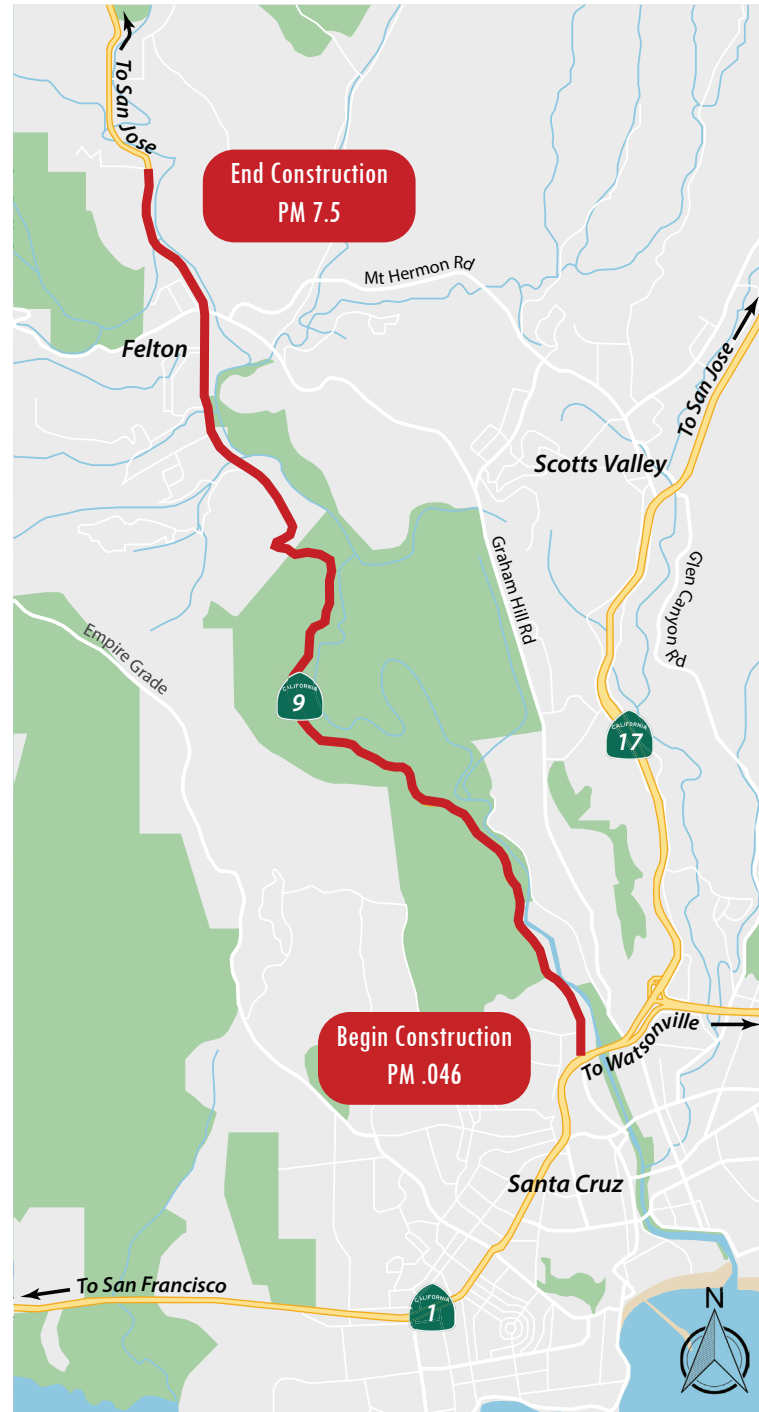

Funding

Fund Source SHOPP
Construction Capital Estimate \$12,188,000
Right of Way Capital Estimate \$687,000

Contact

Project Manager
Douglas Hessing
doug.hessing@dot.ca.gov
(805) 835-6568

